




# CSC BEARING GROUP limited

## 20 mm x 37 mm x 20 mm NTN NKXR25T2Z+IR20 x 25 x 20 Compound bearing

Bearing No. NKXR25T2Z+IR20 x 25 x 20

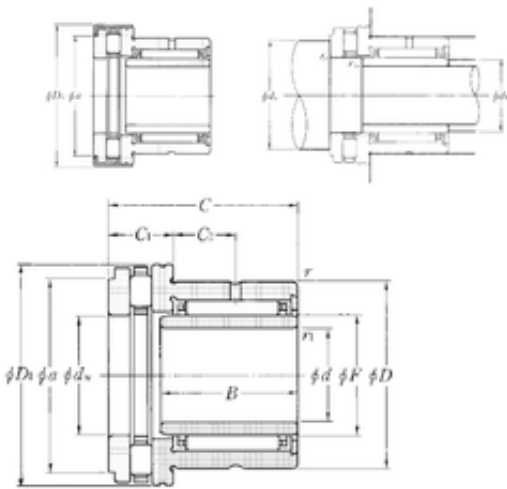

NKXR25T2Z+IR20 x 25 x 20 Bearing 2D drawings and 3D CAD models

|                                |          |
|--------------------------------|----------|
| Bore Diameter                  | 20 mm    |
| Outer Diameter                 | 43 mm    |
| d                              | 20 mm    |
| d1                             | 25 mm    |
| F                              | 25 mm    |
| D                              | 37 mm    |
| D1                             | 42 mm    |
| D2                             | 43 mm    |
| B                              | 20 mm    |
| C                              | 30 mm    |
| ra1 max.                       | 0,3 mm   |
| a                              | 37,7 mm  |
| r min.                         | 0,6 mm   |
| r1 min.                        | 0,3 mm   |
| C1                             | 11 mm    |
| da min.                        | 39 mm    |
| db min                         | 22 mm    |
| ra max.                        | 0,6 mm   |
| C2                             | 9,5 mm   |
| Weight                         | 0,162 Kg |
| Dynamic load rating radial (C) | 14,2 kN  |
| Dynamic load rating axial (C)  | 27,3 kN  |
| Static load rating radial (C0) | 24 kN    |
| Static load rating axial (C0)  | 68 kN    |



# CSC BEARING GROUP limited

|                            |            |
|----------------------------|------------|
| (Grease) Lubrication Speed | 1800 r/min |
|----------------------------|------------|