




CSC BEARING GROUP limited

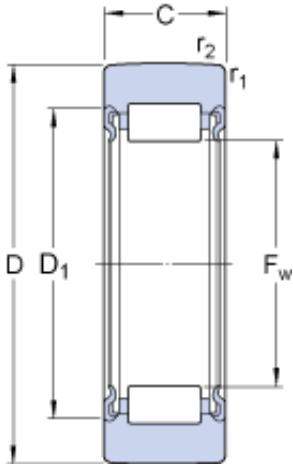

SKF RNA 22/6.2RS roller bearing

Bearing No. RNA 22/6.2RS

| | |
|--|---------------|
| Size | 10x19x11.8 mm |
| Bore Diameter | 10 mm |
| Outer Diameter | 19 mm |
| Width | 11,8 mm |
| D | 19 mm |
| F_w | 10 mm |
| C | 11.8 mm |
| D_1 | 16 mm |
| $r_{1,2} - \text{min.}$ | 0.3 mm |
| Basic dynamic load rating - C | 4 kN |
| Basic static load rating - C_0 | 3.6 kN |
| Fatigue load limit - P_u | 0.425 kN |
| Maximum dynamic radial loads - F_r | 2.6 kN |
| Maximum static radial loads - F_{0r} | 3.6 kN |
| Limiting speed | 7000 r/min |
| Category | Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.015 |
| Product Group | B04144 |
| F_w | 10 mm |
| D_1 | 16 mm |
| | |

RNA 22/6.2RS Bearing 2D drawings and 3D CAD models



CSC BEARING GROUP limited

| | |
|--|----------|
| $r_{1,2}$ min. | 0.3 mm |
| Basic dynamic load rating C | 4.02 kN |
| Basic static load rating C_0 | 3.65 kN |
| Fatigue load limit P_u | 0.425 kN |
| Maximum dynamic radial load F_r max. | 2.55 kN |
| Maximum static radial load F_{0r} max. | 3.6 kN |
| Mass support roller | 0.018 kg |